

NT300




Intelligent 4G LTE VPN Router, Industrial Design,
Dual SIM Failover, RS232 and RS485 Serial connection

NT300 industrial cellular VPN router enables wireless data connectivity over public and private LTE cellular networks at 4G speeds.

NT300 router has dual SIM backup, 1 LAN ports, RS232 and RS485 interfaces are provided to support Serial to IP communication. NT300 router supports 9 to 36 VDC wide range power inputs, designed with reverse-voltage protection mechanism for greater reliability. It is an advanced choice for universal wireless M2M applications with reliable features for data transmission.

TYPICAL APPLICATION

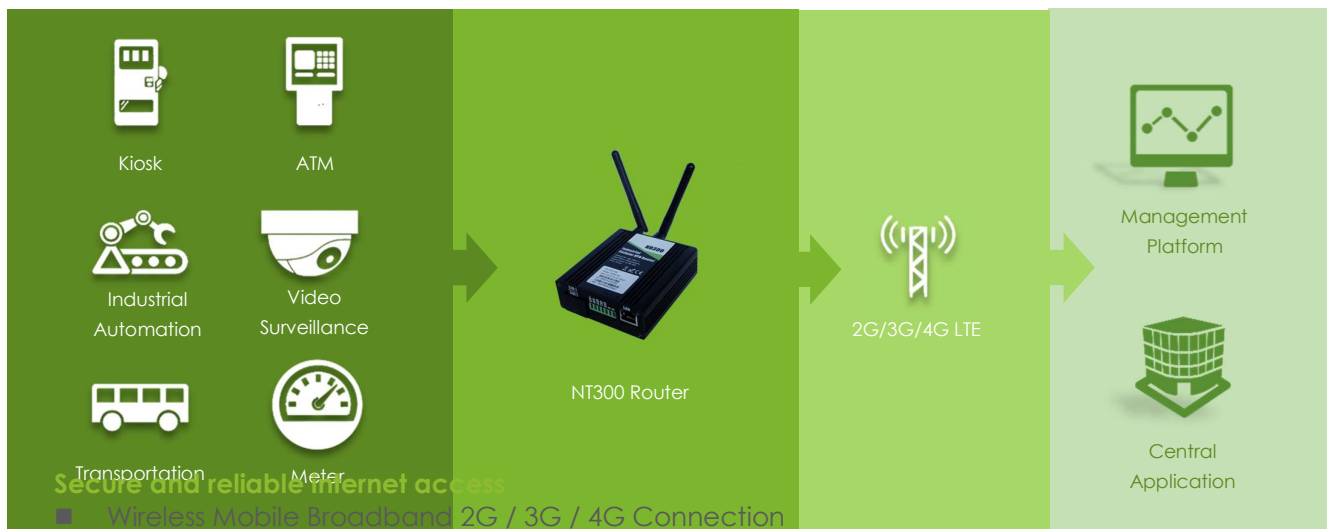

Secure and reliable internet access

- Wireless Mobile Broadband 2G / 3G / 4G Connection
- Connection manager ensure seamless communication
- Support Multiple VPN tunnels for data encryption

Designed for industrial usage

- Power Input Range 9 to 36 VDC
- Industrial design for harsh environment
- Aluminum casing and din-rail installation

Easy to use and easy maintenance

- User friendly web interface for user interaction
- Support Central Management Platform
- Reduce high costs for onsite maintenance

SPECIFICATIONS

CELLULAR	
Frequency Bands	LTE FDD: B1/B2/B3/B4/B5/B7/B8/B20/B28/B28A LTE TDD: B40 WCDMA: B1/B2/B5/B8 GSM: B2/B3/B5/B8 More Bands Demands please contact with us
SIM	2 x SIM slots, 1.8V / 3V
SIM Failover	Auto-switch cases: data limited, no network, network denied, data connection fail
Antennas	2 (MAIN + AUX), SMA female
ETHERNET	
Number of Ports	1 x LAN, Auto 10/100 Mbps
Magnet Isolation Protection	1.5 KV
SERIAL	
Number of Ports	1 x RS-232 (3 PIN) + 1 x RS-485
Connector	Terminal block
ESD Protection	± 15 KV
Baud Rate	300bps to 115200bps
POWER	
Connector	2-pin 3.5 mm female socket
Input Voltage Range	9 to 36 VDC
Power Consumption	Idle: 50 mA@12 V Data link: 200 mA (peak) @12 V
HARDWARE	
Watchdog	Built-in watchdog
LEDs	SYS, NET, USR, RSSI x 3
Reset Button	Reset/restore to factory default button
Ingress Protection	IP30
Housing & Weight	Aluminum, 200 g
Dimensions	82.8 mm x 93.3 mm x 28.8 mm
Installations	DIN-rail mounting
Operating Temperature	-40 °C to 75 °C
Operating Humidity	5% to 95% non-condensing
NETWORK	
Routing	Static routing
Network Protocols	TCP, UDP, IPv4, ICMP, NTP, DNS, HTTP, HTTPS, ARP, PPP, DHCP, IP Passthrough
Connection Manager	Ping Detection, Timer Reboot, ICMP for link detection
Firewall	Flexible access control of TCP, UDP, ICMP packets, MAC address filter
DDNS	Supported some service providers, others can be configured manually
SMS	SMS Configuration
VPN	
OpenVPN	OpenVPN server/client mode, client mode supports up to 5 x OpenVPN tunnels
GRE	Layer2 and Layer3, supports up to 5 x GRE VPN tunnels
MONITORING & MANAGEMENT	
Web GUI	HTTP/HTTPS, firmware upgrade
Command Line Interface	SSHv2 and TELNET
Management platform	Central Management Platform

APP CENTER

Apps

VPN: IPsec, L2TP, PPTP, DMVPN

Network: Dynamic Routing (RIPv1/v2, OSPF, BGP), VRRP, Email Notification, SMS Gateway
SMS Notification

Management: AT over IP, AT over COM, AT over Telnet, SNMPv1/v2/v3/, TR069

Protocol Converter: Modbus Master, Modbus Slave, Modbus ID Mapping, Modbus Gateway
IEC101-104, DLMS to IEC104

More Apps Demands please contact with us

APPROVAL

EMI

EN 55032:2012 Class B

EMS

IEC 61000-4-2 ESD

Level 4

IEC 61000-4-3 RS

Level 3

IEC 61000-4-4 EFT

Level 3

IEC 61000-4-5 Surge

Level 3

IEC 61000-4-6 CS

Level 3

IEC 61000-4-12


Level 3

Vibration


EN50155

DIMENSIONS


FRONT SIDE

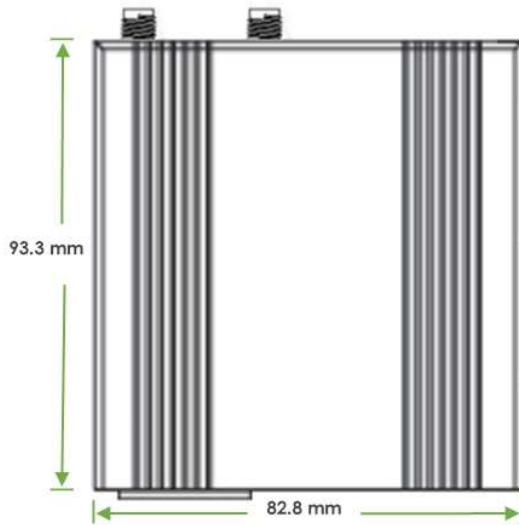

TOP SIDE

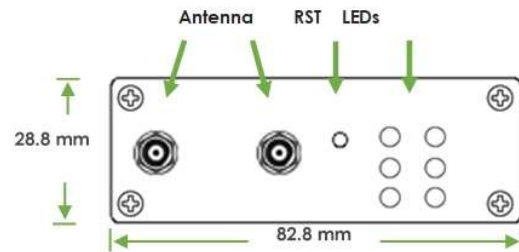

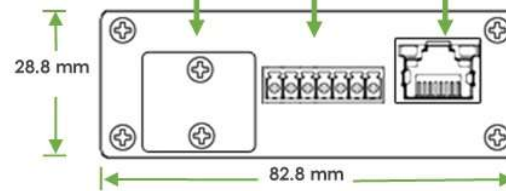

SIM Slot Terminal block Ethernet



BOTTOM SIDE

ORDERING INFORMATION

MODEL	PART NUMBER	DESCRIPTION
 <p>NT300-4G</p>	A301430	4G LTE, Dual SIMs, 1 x Eth, 1 x RS232 (3 PIN), 1 x RS485, 9 - 36VDC
OPTIONAL ACCESSORIES		
 <p>Power Supply</p>	F001009	Power Supply Adapter, EU Plug, Input 100 to 240VAC, Output 12V DC 1.5A
	F001011	Power Supply Adapter, AU Plug, Input 100 to 240VAC, Output 12V DC 1.5A
	F001012	Power Supply Adapter, US Plug, Input 100 to 240VAC, Output 12V DC 1.5A
	F001013	Power Supply Adapter, UK Plug, Input 100 to 240VAC, Output 12V DC 1.5A
 <p>LTE Rubber Antenna</p>	F001006	4G / 3G / 2G Rubber Antenna, 698-960 / 1710-2170 / 2500-2700 MHz, 2dbi, $\Phi 8 \times 108$ mm, AC
 <p>LTE Magnet Antenna</p>	F001007	4G / 3G / 2G Magnet Antenna, 3 Meters Long, 698-960 / 1710-2700 MHz, 3dbi, $\Phi 29 \times 112$ mm, AC
 <p>Din-Rail</p>	F004001	Din Rail Kit, 35 mm, Aluminum with Black Spray Surface, 50 * 40 * 8.5 mm, 3 * M3.5 Screw Holes